


THE NEW VALUE FRONTIER



High efficiency indexable insert drill

DRV

MagicDrill **DRV**

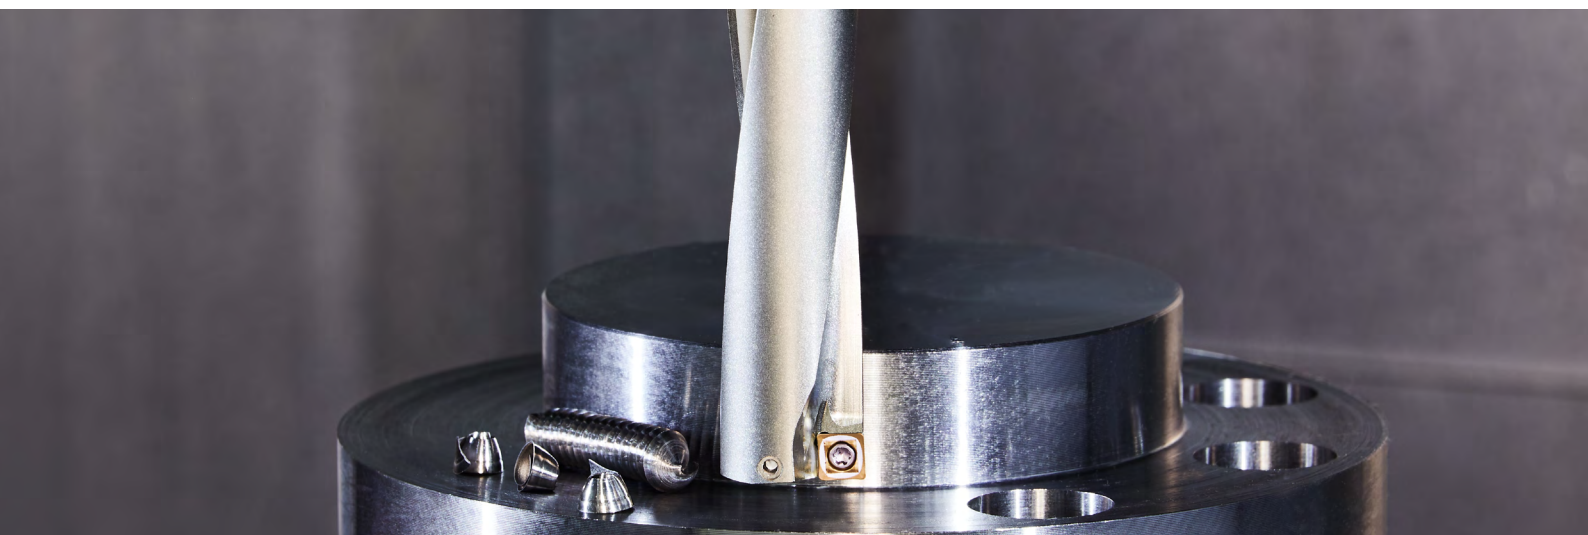

Economical inserts with 4 cutting edges
Excellent chip evacuation with 6D maximum deep-hole drilling

2D to 6D drilling lineup and 4 types of chipbreakers for various machining applications


High speed and highly efficient machining available with the combination of a CVD outer insert and PVD inner insert

Highly rigid design with chattering resistance. Excellent hole accuracy

DRV chamfering attachment



**Inserts and toolholders
lineup expansion**

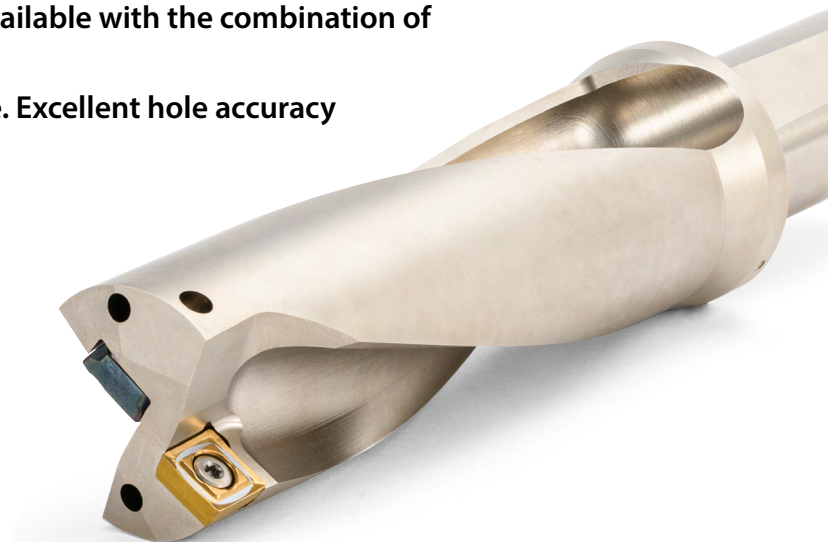

Expanded large toolholder lineup from $\varnothing 40$ mm~ $\varnothing 60$ mm diameter

High efficiency indexable insert drill

MagicDrill DRV


Economical inserts with 4 cutting edges. Excellent chip evacuation with 6D maximum deep-hole drilling. High speed and highly efficient machining available with the combination of CVD (outer edge) and pvd (inner edge) inserts

1


Excellent drilling precision with less variation in cutting diameter up to 6D drilling capabilities with a low cutting force design

Optimal web thickness reduces chattering with a low cutting force design

Web thickness comparison
(In-house evaluation)

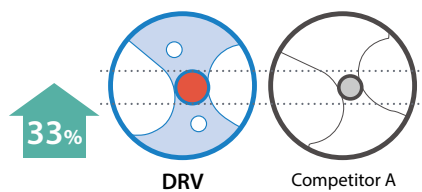


Comparison of cutting diameter variation
(In-house evaluation)

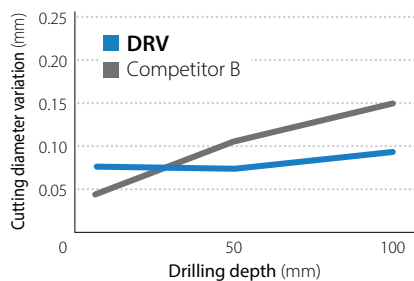

Cutting conditions: $V_c = 150$ m/min, $f = 0.06$ mm/rev
Cutting dia. $\phi 20(5D)$, wet, workpiece: S50C

Cutting force comparison
(In-house evaluation)

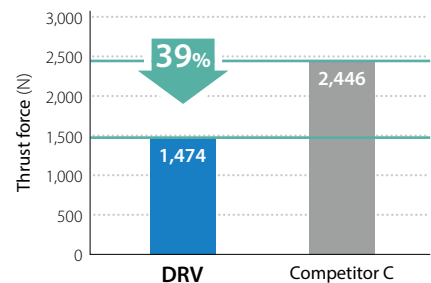


Cutting conditions: $V_c = 200$ m/min, $f = 0.12$ mm/rev
Cutting dia. $\phi 20(3D)$, wet, workpiece: S50C

2

Unique insert design to control chip flow

Outer edge Smooth chip evacuation with compact chips



Chip shape comparison of outer insert cutting edge
(In-house evaluation)



Cutting conditions: $V_c = 150$ m/min, $f = 0.06$ mm/rev, cutting dia. $\phi 20(3D)$, wet, workpiece: S50C

Inner edge Excellent chip evacuation with 6D maximum deep-hole drilling



Weight per unit of length for chips generated by the inner edge (In-house evaluation)

DRV
80 mg/mm

Competitor E
151 mg/mm




Pitch comparison of chips generated by the inner edge (In-house evaluation)


Cutting conditions: $V_c = 250$ m/min, $f = 0.08$ mm/rev, cutting dia. $\phi 20(5D)$, wet, workpiece: SUS304

3 CVD insert on the outer edge for highly efficient machining

High speed and highly efficient machining available with the combination of CVD (outer edge) and PVD (inner edge) inserts

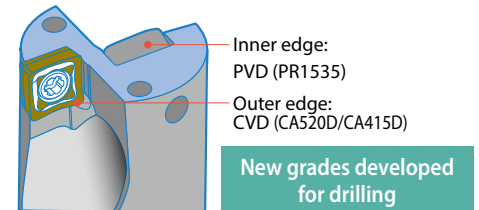


Recommended cutting conditions (Max. value)

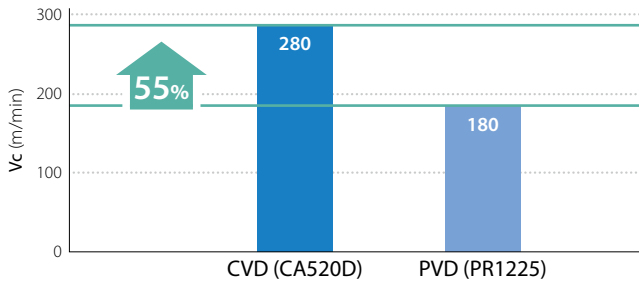

Cutting dia. $\phi 20(3D)$, workpiece: S50C


Wear resistance comparison (In-house evaluation)

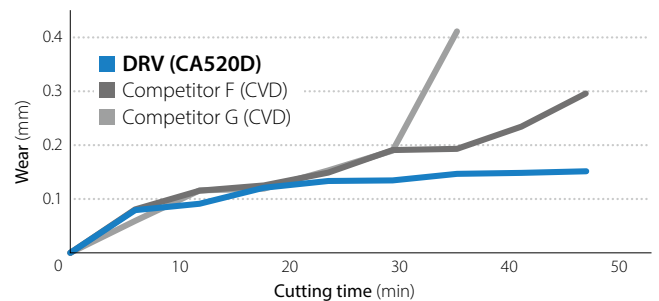


Cutting conditions: $V_c = 200$ m/min, $f = 0.12$ mm/rev, cutting dia. $\phi 20(3D)$, wet, workpiece: SCM440H

4 Economical 4-edge inserts 4 types of chipbreakers for various machining applications


General purpose: GM chipbreaker

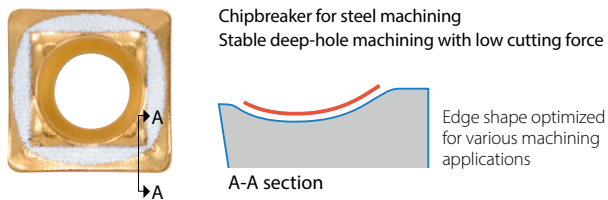


Tough edge: GH chipbreaker

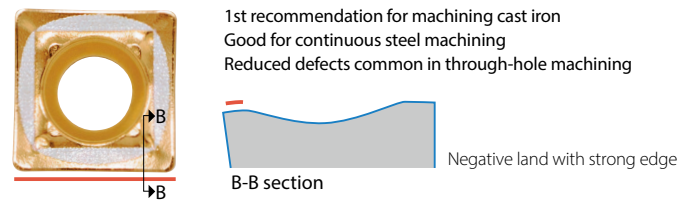

For stainless steel machining: SM chipbreaker

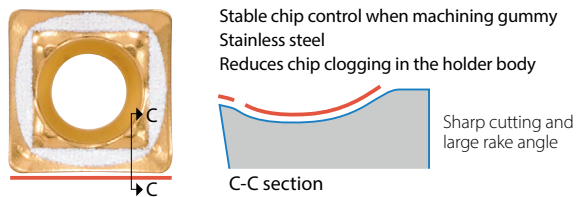

Chip control comparison (In-house evaluation)

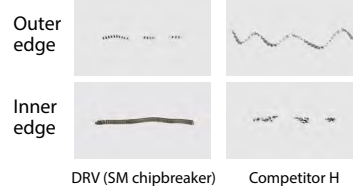


Cutting conditions: $V_c = 100$ m/min, $f = 0.1$ mm/rev, cutting dia. $\phi 20(3D)$, drilling depth 60 mm, wet, workpiece: SUS304

Comparison of remaining chips (In-house evaluation)




Cutting conditions: $V_c = 150$ m/min, $f = 0.08$ mm/rev, cutting dia. $\phi 25(5D)$, drilling depth 98 mm, wet, workpiece: SUS304

For machining soft steel and SS material: XM chipbreaker

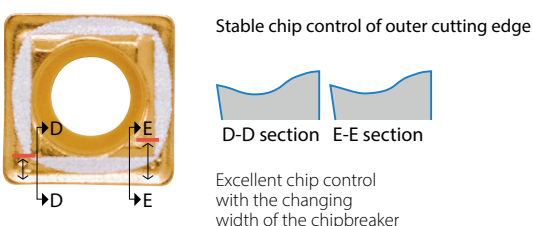

Chip control comparison (In-house evaluation)

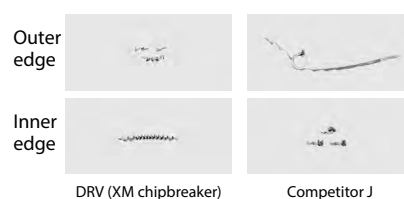

Cutting conditions: $V_c = 200$ m/min, $f = 0.12$ mm/rev, cutting dia. $\phi 16(3D)$, drilling depth 48 mm, wet, workpiece: SS400

Chipbreaker selection chart $\rightarrow$ P.3

5

Applicable to a wide range of machining applications

NEW

Greatly enhanced large diameter toolholders

Full toolholder lineup available


Length from 2D to 6D, diameter from $\varnothing$ 12 mm to $\varnothing$ 60 mm

Chamfering attachment

Expanded large holder lineup from $\varnothing$ 40 mm~ $\varnothing$ 60 mm diameter
(Picture at right: S40-DRV550M-3-17)

Wide lineup of toolholder from 2D to 6D


Chipbreaker selection chart

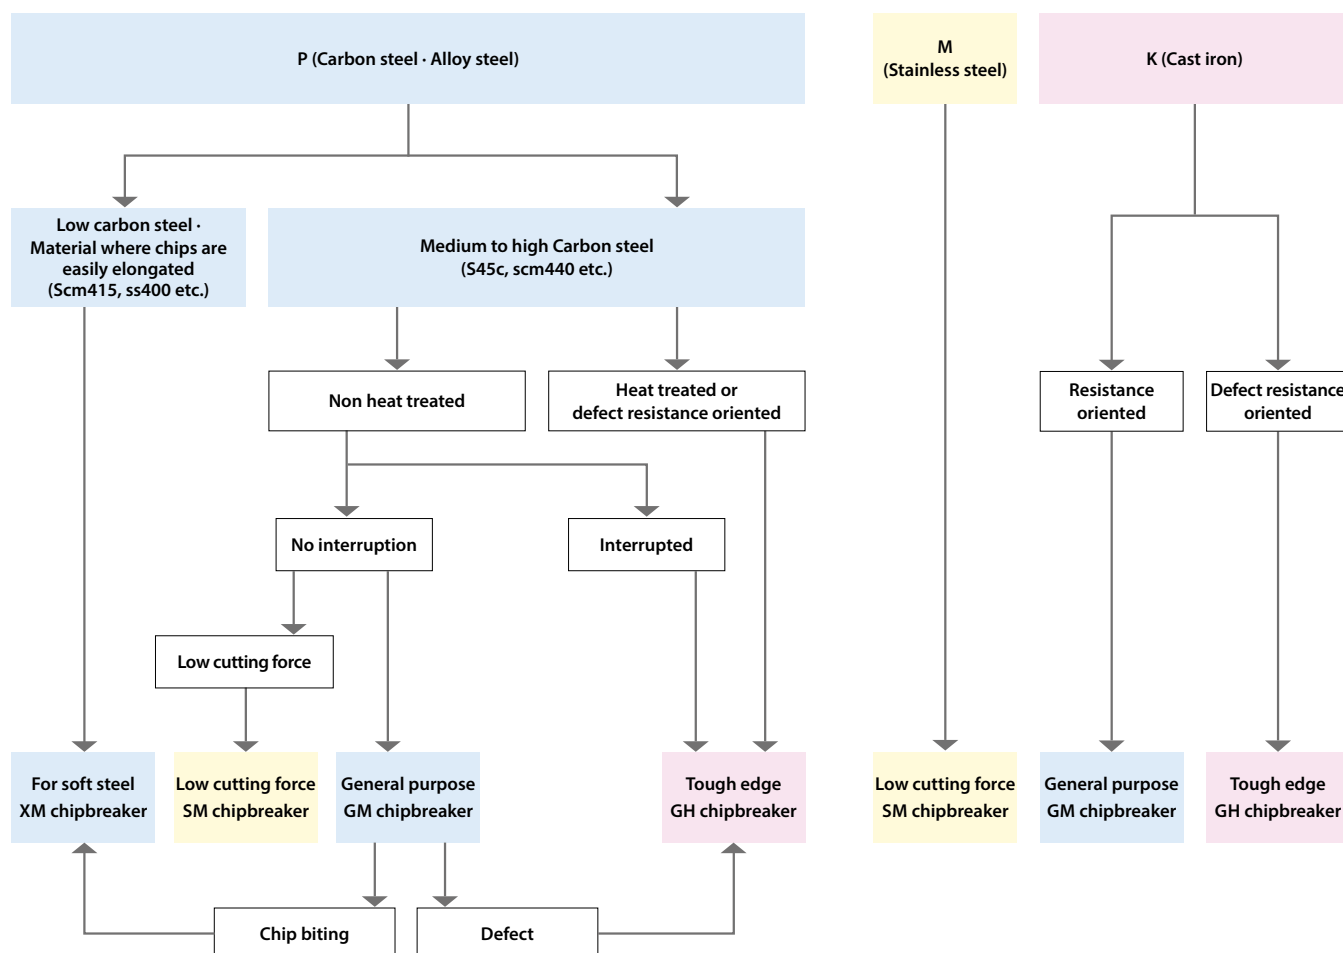

Case studies

Housing SCM420

Vc = 125 m/min (n = 1,660 min⁻¹)
f = 0.08 mm/rev (Vf = 133 mm/min)
Drilling depth 45 mm
Wet (External coolant)
S25-DRV240M-4-07
SCMT070305GM-E PR1225
SCMT070310GM-I PR1535



Cutting time

DRV (ø24-4D) 16 sec

50%
or more

Competitor K
(ø24-4D)


35 sec

Chattering and chip biting occurred in low rigidity workpiece of Competitor K. Speed was reduced to Vc = 60 m/min. DRV finely divided chips for stable machining at Vc = 125 m/min.

(User evaluation)

Nipple S20CF

Vc = 230 m/min (n = 3,330 min⁻¹)
f = 0.13 mm/rev (Vf = 433 mm/min)
Drilling depth 60 mm(4D)
30 mm(2D)
Wet (Internal coolant)
S25-DRV220M-4-06 (4D)
S25-DRV220M-2-06 (2D)
SCMT060205-GM-E PR1225
SCMT060210-GM-I PR1535



Process2
Drilling depth 30 mm
(2D)

Process1
Drilling depth 60 mm
(4D)

Cutting time

DRV (ø24-4D/2D) 12 sec

40%

Competitor L
(ø22-4D/2D)


20 sec

Chattering and deflection occurred with Competitor L. DRV showed stable machining and a shorter cutting time even when the cutting conditions were increased to 1.6 times or more.

(User evaluation)

Valve Body SS400

Vc = 220 mm/min (n = 3,200 min⁻¹)
f = 0.05 mm/rev (Vf = 160 mm/min)
Cutting depths: 50mm (Blind hole/Through-hole)
Wet (Internal coolant)
S25-DRV220M-5-06
SCMT060205-GM-E PR1225
SCMT060210-GM-I PR1535



Cutting time

DRV (ø22-5D) 14 sec

30%
or more

Competitor M
(ø22-5D)

22 sec


Competitor M: Chattering occurred in the continuous part and then vibration was bigger in the crossed-hole.

DRV: There was no chattering even when increasing cutting speed and there was low vibration in the crossed-hole. The DRV achieved 1.5 times machining efficiency.

(User evaluation)

Piston SCM440

Vc = 250 mm/min (n = 3,185 min⁻¹)
f = 0.09 mm/rev (Vf = 290 mm/min)
Cutting depths: 70 mm (Blind hole)
Wet (Internal coolant)
S25-DRV250M-4-07
SCMT070305-GM-E CA520D
SCMT070310-GM-I PR1535



Cutting time

DRV (ø25-4D) 14 sec

25%

Competitor N
(ø25-4D)


19 sec

Competitor N: Loud chattering noise occurred.

DRV: Maintained stable machining. No chattering even at 1.5 times faster cutting speed.

(User evaluation)

DRV toolholder

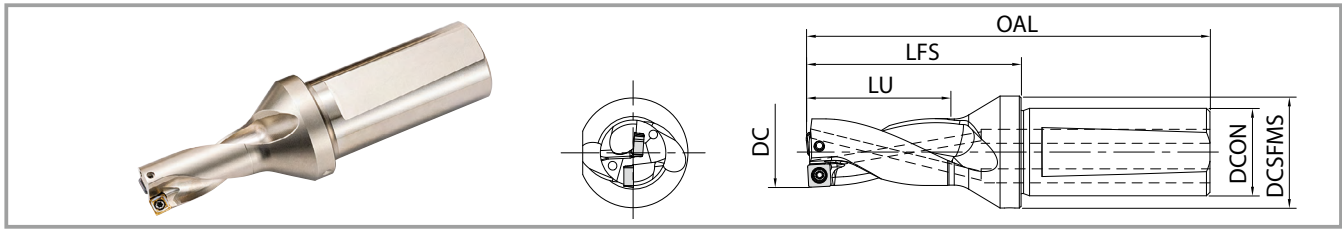

Toolholder dimensions

2D

(Drilling depth: 2 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S20- DRV120M-2-03	●	2	12	82	39	24	20	27	+0.25	SB-2037TRP	FTP-6	Outer edge LCMT030203-□□-E Inner edge LCMT030205-□□-I
DRV125M-2-03	●		12.5	83	40	25			+0.20			
DRV130M-2-03	●		13	84	41	26			+0.15			
DRV135M-2-03	●		13.5	85	42	27			+0.10			
S20- DRV140M-2-04	●	2	14	92	49	28	20	27	+0.40	SB-2037TRP	FTP-6	Outer edge SCMT040205-□□-E Inner edge SCMT040209-□□-I
DRV145M-2-04	●		14.5	93	50	29			+0.35			
DRV150M-2-04	●		15	94	51	30			+0.30			
DRV155M-2-04	●		15.5	95	52	31			+0.25			
S25- DRV160M-2-05	●	2	16	110	56	32	25	32	+0.40	SB-2041TRP	FTP-6	Outer edge SCMT050205-□□-E Inner edge SCMT050210-□□-I
DRV165M-2-05	●		16.5	111	57	33			+0.35			
DRV170M-2-05	●		17	112	58	34			+0.30			
DRV175M-2-05	●		17.5	113	59	35			+0.25			
DRV180M-2-05	●		18	114	60	36			+0.20			
DRV185M-2-05	●		18.5	115	61	37			+0.15			
S25- DRV190M-2-06	●	2	19	113	59	38	25	32	+0.65	SB-2555TRP	DTPM-8	Outer edge SCMT060205-□□-E Inner edge SCMT060210-□□-I
DRV195M-2-06	●		19.5	114	60	39			+0.60			
DRV200M-2-06	●		20	115	61	40			+0.55			
DRV205M-2-06	●		20.5	116	62	41			+0.50			
DRV210M-2-06	●		21	117	63	42			+0.45			
DRV215M-2-06	●		21.5	118	64	43			+0.35			
DRV220M-2-06	●		22	119	65	44			+0.30			
S25- DRV225M-2-07	●	2	22.5	120	66	45	25	32	+0.90	SB-3060TRP	DTPM-10	Outer edge SCMT070305-□□-E Inner edge SCMT070310-□□-I
DRV230M-2-07	●		23	121	67	46			+0.80			
DRV235M-2-07	●		23.5	122	68	47			+0.75			
DRV240M-2-07	●		24	123	69	48			+0.70			
DRV245M-2-07	●		24.5	124	70	49			+0.65			
DRV250M-2-07	●		25	125	71	50			+0.60			
DRV255M-2-07	●		25.5	126	72	51			+0.50			
DRV260M-2-07	●		26	127	73	52			+0.45			
S32- DRV270M-2-09	●	2	27	136	77	54	32	41	+1.05	SB-3573TRP	DTPM-10	Outer edge SCMT090405-□□-E Inner edge SCMT090410-□□-I
DRV280M-2-09	●		28	138	79	56			+0.95			
DRV290M-2-09	●		29	140	81	58			+0.85			
DRV300M-2-09	●		30	142	83	60			+0.75			
DRV310M-2-09	●		31	144	85	62			+0.60			
DRV320M-2-09	●		32	146	87	64			+0.50			

●: Available

DRV toolholder

Toolholder dimensions

2D

(Drilling depth: 2 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S40- NEW	DRV330M-2-11	●	33	161	92	66	40	49	+1.25	SB-4086TRP	DTPM-15	Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
	DRV340M-2-11	●	34	163	94	68			+1.15			
	DRV350M-2-11	●	35	165	96	70			+1.00			
	DRV360M-2-11	●	36	167	98	72			+0.90			
	DRV370M-2-11	●	37	169	100	74			+0.80			
	DRV380M-2-11	●	38	171	102	76			+0.65			
	DRV390M-2-11	●	39	173	104	78			+0.55			
S40- NEW	DRV400M-2-14	●	40	181	112	80	40	49	+1.75	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
	DRV410M-2-14	●	41	183	114	82			+1.60			
	DRV420M-2-14	●	42	185	116	84			+1.50			
	DRV430M-2-14	●	43	187	118	86			+1.40			
	DRV440M-2-14	●	44	189	120	88			+1.30			
	DRV450M-2-14	●	45	191	122	90			+1.15			
	DRV460M-2-14	●	46	193	124	92		54	+1.05			
	DRV470M-2-14	●	47	195	126	94			+0.95			
	DRV480M-2-14	●	48	197	128	96			+0.80			
	DRV490M-2-14	●	49	199	130	98			+0.70			
S40- NEW	DRV500M-2-17	●	50	198	129	100	40	59	+2.10	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
	DRV510M-2-17	●	51	200	131	102			+1.95			
	DRV520M-2-17	●	52	202	133	104			+1.85			
	DRV530M-2-17	●	53	204	135	106			+1.75			
	DRV540M-2-17	●	54	206	137	108			+1.65			
	DRV550M-2-17	●	55	208	139	110			+1.50			
	DRV560M-2-17	●	56	210	141	112			+1.40			
	DRV570M-2-17	●	57	212	143	114		64	+1.30			
	DRV580M-2-17	●	58	214	145	116			+1.15			
	DRV590M-2-17	●	59	216	147	118			+1.05			
	DRV600M-2-17	●	60	218	149	120			+0.95			

When offset drilling, reduce feed rate to 0.08 mm/rev or less
See page 21 for adjustable sleeve (SHE)


● : Available

■ Estimated cutting tolerance (2D)

DC	Estimated cutting tolerance (mm)
φ12 - φ60	+0.30 0

The above values are estimates.
These values may change due to machine, workpiece, clamping power, and cutting conditions.

DRV toolholder

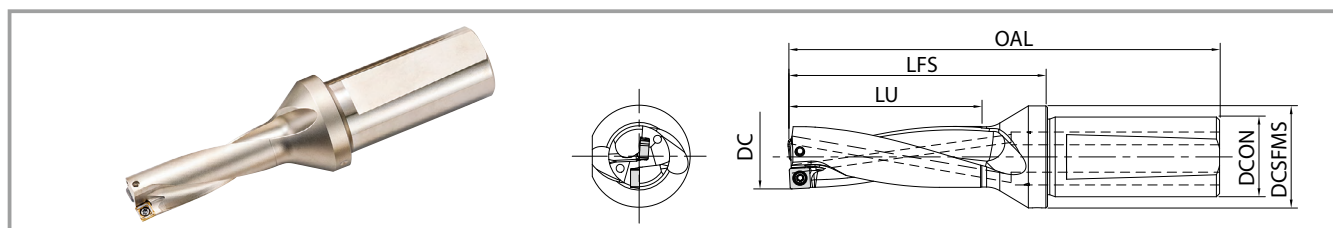

Toolholder dimensions

3D

(Drilling depth: 3 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S20- DRV120M-3-03	●	2	12	94	51	36	20	27	+0.25	SB-2037TRP	FTP-6	Outer edge LCMT030203-□□-E Inner edge LCMT030205-□□-I
DRV125M-3-03	●		12.5	96	53	37.5			+0.20			
DRV130M-3-03	●		13	97	54	39			+0.15			
DRV135M-3-03	●		13.5	99	56	40.5			+0.10			
S20- DRV140M-3-04	●	2	14	106	63	42	20	27	+0.40	SB-2037TRP	FTP-6	Outer edge SCMT040205-□□-E Inner edge SCMT040209-□□-I
DRV145M-3-04	●		14.5	108	65	43.5			+0.35			
DRV150M-3-04	●		15	109	66	45			+0.30			
DRV155M-3-04	●		15.5	111	68	46.5			+0.25			
S25- DRV160M-3-05	●	2	16	126	72	48	25	32	+0.40	SB-2041TRP	FTP-6	Outer edge SCMT050205-□□-E Inner edge SCMT050210-□□-I
DRV165M-3-05	●		16.5	127	73	49.5			+0.35			
DRV170M-3-05	●		17	129	75	51			+0.30			
DRV175M-3-05	●		17.5	130	76	52.5			+0.25			
DRV180M-3-05	●		18	132	78	54			+0.20			
DRV185M-3-05	●		18.5	133	79	55.5			+0.15			
S25- DRV190M-3-06	●	2	19	132	78	57	25	32	+0.65	SB-2555TRP	DTPM-8	Outer edge SCMT060205-□□-E Inner edge SCMT060210-□□-I
DRV195M-3-06	●		19.5	134	80	58.5			+0.60			
DRV200M-3-06	●		20	135	81	60			+0.55			
DRV205M-3-06	●		20.5	137	83	61.5			+0.50			
DRV210M-3-06	●		21	138	84	63			+0.45			
DRV215M-3-06	●		21.5	140	86	64.5			+0.35			
DRV220M-3-06	●		22	141	87	66			+0.30			
S25- DRV225M-3-07	●	2	22.5	142	88	67.5	25	32	+0.90	SB-3060TRP	DTPM-10	Outer edge SCMT070305-□□-E Inner edge SCMT070310-□□-I
DRV230M-3-07	●		23	144	90	69			+0.80			
DRV235M-3-07	●		23.5	145	91	70.5			+0.75			
DRV240M-3-07	●		24	147	93	72			+0.70			
DRV245M-3-07	●		24.5	148	94	73.5			+0.65			
DRV250M-3-07	●		25	150	96	75			+0.60			
DRV255M-3-07	●		25.5	151	97	76.5			+0.50			
DRV260M-3-07	●		26	153	99	78			+0.45			
S32- DRV265M-3-09	●	2	26.5	161	102	79.5	32	41	+1.15	SB-3573TRP	DTPM-10	Outer edge SCMT090405-□□-E Inner edge SCMT090410-□□-I
DRV270M-3-09	●		27	163	104	81			+1.05			
DRV275M-3-09	●		27.5	164	105	82.5			+1.00			
DRV280M-3-09	●		28	166	107	84			+0.95			
DRV285M-3-09	●		28.5	167	108	85.5			+0.90			
DRV290M-3-09	●		29	169	110	87			+0.85			
DRV295M-3-09	●		29.5	170	111	88.5			+0.80			
DRV300M-3-09	●		30	172	113	90			+0.75			
DRV305M-3-09	●		30.5	173	114	91.5			+0.65			
DRV310M-3-09	●		31	175	116	93			+0.60			
DRV315M-3-09	●		31.5	176	117	94.5			+0.55			
DRV320M-3-09	●		32	178	119	96			+0.50			

●: Available

DRV toolholder

Toolholder dimensions

3D

(Drilling depth: 3 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S40- NEW	●	2	33	194	125	99	40	49	+1.25	SB-4086TRP	DTPM-15	Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
	●		34	197	128	102			+1.15			
	●		35	200	131	105			+1.00			
	●		36	203	134	108			+0.90			
	●		37	206	137	111			+0.80			
	●		38	209	140	114			+0.65			
	●		39	212	143	117			+0.55			
S40- NEW	●	2	40	221	152	120	40	49	+1.75	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
	●		41	224	155	123			+1.60			
	●		42	227	158	126			+1.50			
	●		43	230	161	129			+1.40			
	●		44	233	164	132			+1.30			
	●		45	236	167	135			+1.15			
	●		46	239	170	138		54	+1.05			
	●		47	242	173	141			+0.95			
	●		48	245	176	144			+0.80			
	●		49	248	179	147			+0.70			
S40- NEW	●	2	50	248	179	150	40	59	+2.10	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
	●		51	251	182	153			+1.95			
	●		52	254	185	156			+1.85			
	●		53	257	188	159			+1.75			
	●		54	260	191	162			+1.65			
	●		55	263	194	165			+1.50			
	●		56	266	197	168		64	+1.40			
	●		57	269	200	171			+1.30			
	●		58	272	203	174			+1.15			
	●		59	275	206	177			+1.05			
	●		60	278	209	180			+0.95			

When offset drilling, reduce feed rate to 0.08 mm/rev or less
See page 21 for adjustable sleeve (SHE)


● : Available

Estimated cutting tolerance (3D)

DC	Estimated cutting tolerance (mm)
φ12 - φ60	+0.30 0

The above values are estimates.
These values may change due to machine, workpiece, clamping power, and cutting conditions.

DRV toolholder

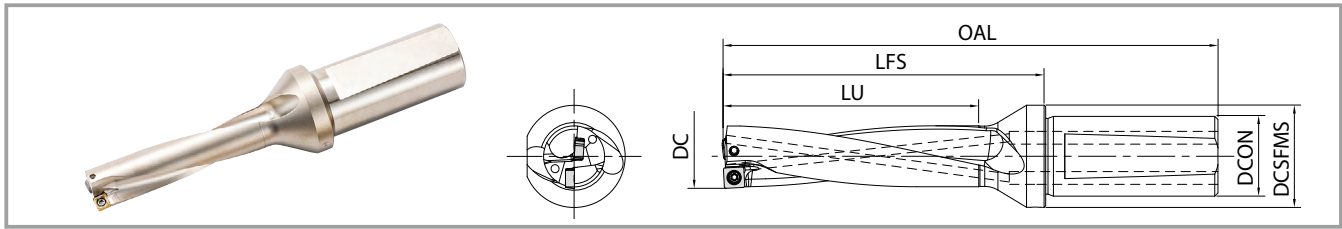

Toolholder dimensions

4D

(Drilling depth: 4 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S20- DRV120M-4-03	●	2	12	106	63	48	20	27	+0.25	SB-2037TRP	FTP-6	Outer edge LCMT030203-□□-E Inner edge LCMT030205-□□-I
DRV125M-4-03	●		12.5	108	65	50			+0.20			
DRV130M-4-03	●		13	110	67	52			+0.15			
DRV135M-4-03	●		13.5	112	69	54			+0.10			
S20- DRV140M-4-04	●	2	14	120	77	56	20	27	+0.40	SB-2037TRP	FTP-6	Outer edge SCMT040205-□□-E Inner edge SCMT040209-□□-I
DRV145M-4-04	●		14.5	122	79	58			+0.35			
DRV150M-4-04	●		15	124	81	60			+0.30			
DRV155M-4-04	●		15.5	126	83	62			+0.25			
S25- DRV160M-4-05	●	2	16	142	88	64	25	32	+0.40	SB-2041TRP	FTP-6	Outer edge SCMT050205-□□-E Inner edge SCMT050210-□□-I
DRV165M-4-05	●		16.5	144	90	66			+0.35			
DRV170M-4-05	●		17	146	92	68			+0.30			
DRV175M-4-05	●		17.5	148	94	70			+0.25			
DRV180M-4-05	●		18	150	96	72			+0.20			
DRV185M-4-05	●		18.5	152	98	74			+0.15			
S25- DRV190M-4-06	●	2	19	151	97	76	25	32	+0.65	SB-2555TRP	DTPM-8	Outer edge SCMT060205-□□-E Inner edge SCMT060210-□□-I
DRV195M-4-06	●		19.5	153	99	78			+0.60			
DRV200M-4-06	●		20	155	101	80			+0.55			
DRV205M-4-06	●		20.5	157	103	82			+0.50			
DRV210M-4-06	●		21	159	105	84			+0.45			
DRV215M-4-06	●		21.5	161	107	86			+0.35			
DRV220M-4-06	●		22	163	109	88			+0.30			
S25- DRV225M-4-07	●	2	22.5	165	111	90	25	32	+0.90	SB-3060TRP	DTPM-10	Outer edge SCMT070305-□□-E Inner edge SCMT070310-□□-I
DRV230M-4-07	●		23	167	113	92			+0.80			
DRV235M-4-07	●		23.5	169	115	94			+0.75			
DRV240M-4-07	●		24	171	117	96			+0.70			
DRV245M-4-07	●		24.5	173	119	98			+0.65			
DRV250M-4-07	●		25	175	121	100			+0.60			
DRV255M-4-07	●		25.5	177	123	102			+0.50			
DRV260M-4-07	●		26	179	125	104			+0.45			
S32- DRV270M-4-09	●	2	27	190	131	108	32	41	+1.05	SB-3573TRP	DTPM-10	Outer edge SCMT090405-□□-E Inner edge SCMT090410-□□-I
DRV280M-4-09	●		28	194	135	112			+0.95			
DRV290M-4-09	●		29	198	139	116			+0.85			
DRV300M-4-09	●		30	202	143	120			+0.75			
DRV310M-4-09	●		31	206	147	124			+0.60			
DRV320M-4-09	●		32	210	151	128			+0.50			

● : Available

DRV toolholder

Toolholder dimensions

4D

(Drilling depth: 4 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S40- DRV330M-4-11	●	2	33	227	158	132	40	49	+1.25	SB-4086TRP	DTPM-15	Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
DRV340M-4-11	●		34	231	162	136			+1.15			
DRV350M-4-11	●		35	235	166	140			+1.00			
DRV360M-4-11	●		36	239	170	144			+0.90			
DRV370M-4-11	●		37	243	174	148			+0.80			
DRV380M-4-11	●		38	247	178	152			+0.65			
DRV390M-4-11	●		39	251	182	156			+0.55			
S40- DRV400M-4-14	●	2	40	261	192	160	40	49	+1.75	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
NEW DRV410M-4-14	●		41	265	196	164			+1.60			
DRV420M-4-14	●		42	269	200	168			+1.50			
DRV430M-4-14	●		43	273	204	172			+1.40			
DRV440M-4-14	●		44	277	208	176			+1.30			
DRV450M-4-14	●		45	281	212	180			+1.15			
DRV460M-4-14	●		46	285	216	184		54	+1.05			
DRV470M-4-14	●		47	289	220	188			+0.95			
S50- DRV480M-4-14	●		48	293	224	192	50	59	+0.80			
NEW DRV490M-4-14	●		49	297	228	196			+0.70			
S50- DRV500M-4-17	●	2	50	298	229	200	50	59	+2.10	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
NEW DRV510M-4-17	●		51	302	233	204			+1.95			
DRV520M-4-17	●		52	306	237	208			+1.85			
DRV530M-4-17	●		53	310	241	212			+1.75			
DRV540M-4-17	●		54	314	245	216			+1.65			
DRV550M-4-17	●		55	318	249	220			+1.50			
DRV560M-4-17	●		56	322	253	224			+1.40			
DRV570M-4-17	●		57	326	257	228		64	+1.30			
DRV580M-4-17	●		58	330	261	232			+1.15			
DRV590M-4-17	●		59	334	265	236			+1.05			
DRV600M-4-17	●		60	338	269	240			+0.95			

When offset drilling, reduce feed rate to 0.06 mm/rev or less
See page 21 for adjustable sleeve (SHE)


● : Available

■ Estimated cutting tolerance (4D)

DC	Estimated cutting tolerance (mm)
φ12 - φ39	+0.35 0
φ40 - φ60	+0.40 0

The above values are estimates.
These values may change due to machine, workpiece, clamping power, and cutting conditions.

DRV toolholder

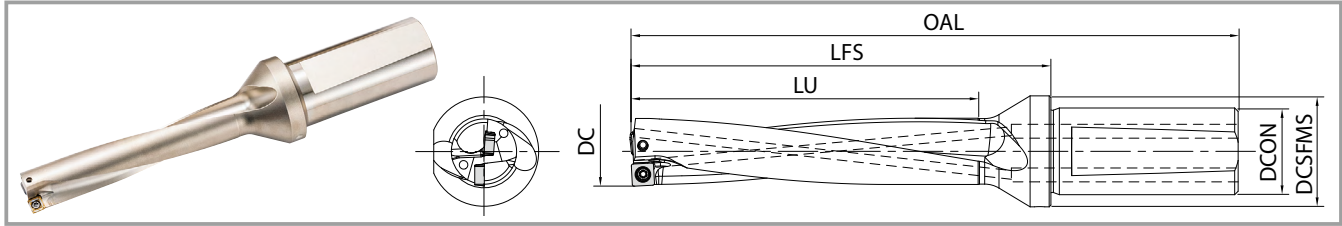

Toolholder dimensions

5D

(Drilling depth: 5 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S20- DRV120M-5-03	●	2	12	118	75	60	20	27	+0.25	SB-2037TRP	FTP-6	Outer edge LCMT030203-□□-E Inner edge LCMT030205-□□-I
S20- DRV130M-5-03	●		13	123	80	65			+0.15			
S20- DRV140M-5-04	●	2	14	134	91	70	20	27	+0.40	SB-2037TRP	FTP-6	Outer edge SCMT040205-□□-E Inner edge SCMT040209-□□-I
S20- DRV150M-5-04	●		15	139	96	75			+0.30			
S25- DRV160M-5-05	●	2	16	158	104	80	25	32	+0.40	SB-2041TRP	FTP-6	Outer edge SCMT050205-□□-E Inner edge SCMT050210-□□-I
S25- DRV170M-5-05	●		17	163	109	85			+0.30			
S25- DRV180M-5-05	●	2	18	168	114	90	25	32	+0.20	SB-2555TRP	DTPM-8	Outer edge SCMT060205-□□-E Inner edge SCMT060210-□□-I
S25- DRV190M-5-06	●		19	170	116	95			+0.65			
S25- DRV200M-5-06	●	2	20	175	121	100	25	32	+0.55			Outer edge SCMT060205-□□-E Inner edge SCMT060210-□□-I
S25- DRV210M-5-06	●		21	180	126	105			+0.45			
S25- DRV220M-5-06	●	2	22	185	131	110	25	32	+0.30			Outer edge SCMT060205-□□-E Inner edge SCMT060210-□□-I
S25- DRV230M-5-07	●		23	190	136	115			+0.80			
S25- DRV240M-5-07	●	2	24	195	141	120	25	32	+0.70	SB-3060TRP	DTPM-10	Outer edge SCMT070305-□□-E Inner edge SCMT070310-□□-I
S25- DRV250M-5-07	●		25	200	146	125			+0.60			
S25- DRV260M-5-07	●	2	26	205	151	130	25	32	+0.45			Outer edge SCMT070305-□□-E Inner edge SCMT070310-□□-I
S32- DRV270M-5-09	●		27	217	158	135			+1.05			
S32- DRV280M-5-09	●	2	28	222	163	140	32	41	+0.95	SB-3573TRP	DTPM-10	Outer edge SCMT090405-□□-E Inner edge SCMT090410-□□-I
S32- DRV290M-5-09	●		29	227	168	145			+0.85			
S32- DRV300M-5-09	●	2	30	232	173	150	32	41	+0.75			Outer edge SCMT090405-□□-E Inner edge SCMT090410-□□-I
S32- DRV310M-5-09	●		31	237	178	155			+0.60			
S32- DRV320M-5-09	●	2	32	242	183	160	32	41	+0.50			Outer edge SCMT090405-□□-E Inner edge SCMT090410-□□-I
S40- DRV330M-5-11	●		33	260	191	165	40	49	+1.25	SB-4086TRP	DTPM-15	Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
S40- DRV340M-5-11	●	2	34	265	196	170			+1.15			
S40- DRV350M-5-11	●		35	270	201	175	40	49	+1.00			Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
S40- DRV360M-5-11	●	2	36	275	206	180			+0.90			
S40- DRV370M-5-11	●		37	280	211	185	40	49	+0.80			Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
S40- DRV380M-5-11	●	2	38	285	216	190			+0.65			
S40- DRV390M-5-11	●		39	290	221	195	40	49	+0.55			Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
S40- DRV400M-5-14	●	2	40	301	232	200			+1.75	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
S40- DRV410M-5-14	●		41	306	237	205	40	49	+1.60			
S40- DRV420M-5-14	●	2	42	311	242	210			+1.50	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
S40- DRV430M-5-14	●		43	316	247	215	40	49	+1.40			
S40- DRV440M-5-14	●	2	44	321	252	220			+1.30	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
S40- DRV450M-5-14	●		45	326	257	225	40	49	+1.15			
S40- DRV460M-5-14	●	2	46	331	262	230			+1.05	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
S40- DRV470M-5-14	●		47	336	267	235	40	49	+0.95			
S50- DRV480M-5-14	●	2	48	341	272	240			+0.80	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
S50- DRV490M-5-14	●		49	346	277	245	50	59	+0.70			
S50- DRV500M-5-17	●	2	50	348	279	250			+2.10	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
S50- DRV510M-5-17	●		51	353	284	255	50	59	+1.95			
S50- DRV520M-5-17	●	2	52	358	289	260			+1.85	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
S50- DRV530M-5-17	●		53	363	294	265	50	59	+1.75			
S50- DRV540M-5-17	●	2	54	368	299	270			+1.65	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
S50- DRV550M-5-17	●		55	373	304	275	50	59	+1.50			
S50- DRV560M-5-17	●	2	56	378	309	280			+1.40	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
S50- DRV570M-5-17	●		57	383	314	285	50	59	+1.30			
S50- DRV580M-5-17	●	2	58	388	319	290			+1.15	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
S50- DRV590M-5-17	●		59	393	324	295	50	59	+1.05			
S50- DRV600M-5-17	●	2	60	398	329	300			+0.95			

When offset drilling, reduce feed rate to 0.05 mm/rev or less - See page 21 for adjustable sleeve (SHF)


■ Estimated cutting tolerance (5D)

●: Available

DC	Estimated cutting tolerance (mm)
ø12 - ø39	+0.35 0
ø40 - ø60	+0.40 0

The left values are estimates.
These values may change due to machine, workpiece, clamping power, and cutting conditions.

DRV toolholder

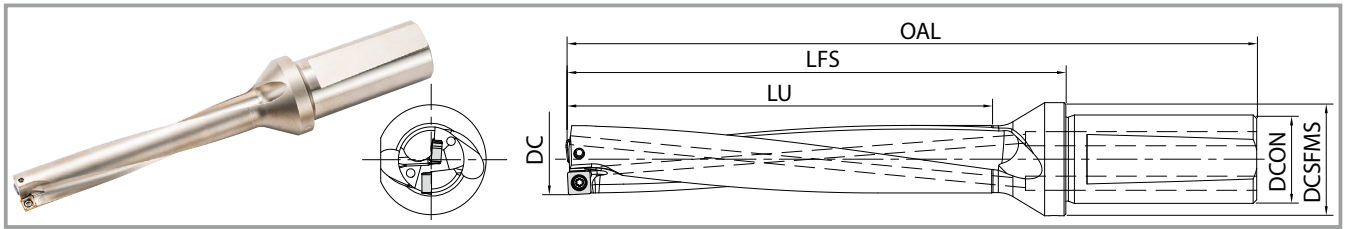

Toolholder dimensions

6D

(Drilling depth: 6 × DC)

Description	Availability	No. of inserts	Dimensions (mm)						Max. radial offset (mm)	Spare parts		Applicable inserts
			DC	OAL	LFS	LU	DCON	DCSFMS		Clamp screw	Wrench	
S20- DRV120M-6-03	●	2	12	130	87	72	20	27	+0.25	SB-2037TRP	FTP-6	Outer edge LCMT030203-□□-E Inner edge LCMT030205-□□-I
DRV130M-6-03	●		13	136	93	78			+0.15			
S20- DRV140M-6-04	●	2	14	148	105	84	20	27	+0.40	SB-2037TRP	FTP-6	Outer edge SCMT040205-□□-E Inner edge SCMT040209-□□-I
DRV150M-6-04	●		15	154	111	90			+0.30			
S25- DRV160M-6-05	●	2	16	174	120	96	25	32	+0.40	SB-2041TRP	FTP-6	Outer edge SCMT050205-□□-E Inner edge SCMT050210-□□-I
DRV170M-6-05	●		17	180	126	102			+0.30			
DRV180M-6-05	●		18	186	132	108			+0.20			
S25- DRV190M-6-06	●	2	19	189	135	114	25	32	+0.65	SB-2555TRP	DTPM-8	Outer edge SCMT060205-□□-E Inner edge SCMT060210-□□-I
DRV200M-6-06	●		20	195	141	120			+0.55			
DRV210M-6-06	●		21	201	147	126			+0.45			
DRV220M-6-06	●		22	207	153	132			+0.30			
S25- DRV230M-6-07	●	2	23	213	159	138	25	32	+0.80	SB-3060TRP	DTPM-10	Outer edge SCMT070305-□□-E Inner edge SCMT070310-□□-I
DRV240M-6-07	●		24	219	165	144			+0.70			
DRV250M-6-07	●		25	225	171	150			+0.60			
DRV260M-6-07	●		26	231	177	156			+0.45			
S32- DRV270M-6-09	●	2	27	244	185	162	32	41	+1.05	SB-3573TRP	DTPM-10	Outer edge SCMT090405-□□-E Inner edge SCMT090410-□□-I
DRV280M-6-09	●		28	250	191	168			+0.95			
DRV290M-6-09	●		29	256	197	174			+0.85			
DRV300M-6-09	●		30	262	203	180			+0.75			
DRV310M-6-09	●		31	268	209	186			+0.60			
DRV320M-6-09	●		32	274	215	192			+0.50			
S40- DRV330M-6-11	●	2	33	293	224	198	40	49	+1.25	SB-4086TRP	DTPM-15	Outer edge SCMT110406-□□-E Inner edge SCMT110410-□□-I
DRV340M-6-11	●		34	299	230	204			+1.15			
DRV350M-6-11	●		35	305	236	210			+1.00			
DRV360M-6-11	●		36	311	242	216			+0.90			
DRV370M-6-11	●		37	317	248	222			+0.80			
DRV380M-6-11	●		38	323	254	228			+0.65			
DRV390M-6-11	●		39	329	260	234			+0.55			
S40- DRV400M-6-14	●	2	40	341	272	240	40	49	+1.75	SB-50120TRPH	TTP-20	Outer edge SCMT140508-□□-E Inner edge SCMT140510-□□-I
NEW DRV410M-6-14	●		41	347	278	246			+1.60			
DRV420M-6-14	●		42	353	284	252			+1.50			
DRV430M-6-14	●		43	359	290	258			+1.40			
DRV440M-6-14	●		44	365	296	264			+1.30			
DRV450M-6-14	●		45	371	302	270			+1.15			
S50- DRV500M-6-17	●	2	50	398	329	300	50	59	+2.10	SB-60130TRP	TTP-20	Outer edge SCMT170608-□□-E Inner edge SCMT170610-□□-I
NEW DRV550M-6-17	●		55	428	359	330			+1.50			
DRV600M-6-17	●		60	458	389	360			+0.95			

When offset drilling, reduce feed rate to 0.04 mm/rev or less · See page 21 for adjustable sleeve (SHE)





● : Available

■ Estimated cutting tolerance (6D)

DC	Estimated cutting tolerance (mm)
φ12 - φ39	+0.45 0
φ40 - φ60	+0.50 0

The left values are estimates.
These values may change due to machine, workpiece, clamping power, and cutting conditions.

DRV insert

Usage classification				P	Carbon steel • Alloy steel		☆	★		★				
★: 1st recommendation (High speed and highly efficient machining) ☆: 2nd recommendation (Stable machining oriented)					Mold steel		☆	★		★				
					M		Stainless steel		☆	★		★		
					K		Cast iron		☆		★	★		
Shape		Application	Description	Dimensions (mm)				Angle	MEGACOAT	CVD coated carbide		MEGACOAT NANO		
				IC W1/L	S	D1	RE	AN	PR1225	CA520D	CA415D	PR1535		
		General purpose	LCMT	030203-GM-E	4.40/5.54	2.0	2.3	0.3	7°	●	●	●		
			SCMT	040205-GM-E	4.80	2.2	2.4	0.5	7°	●	●	●		
				050205-GM-E	5.25	2.6	2.4	0.5	7°	●	●	●		
				060205-GM-E	6.40	2.8	2.9	0.5	7°	●	●	●		
				070305-GM-E	7.65	3.2	3.5	0.5	7°	●	●	●		
				090405-GM-E	9.10	4.1	4.0	0.5	7°	●	●	●		
				110406-GM-E	11.00	4.5	4.6	0.6	7°	●	●	●		
				140508-GM-E	13.80	5.0	5.7	0.8	7°	●	●	●		
	170608-GM-E	16.80	6.58	6.9	0.8	7°	●	●	●					
		Tough edge	NEW	LCMT	030203-GH-E	4.40/5.54	2.0	2.3	0.3	7°	●	●	●	
			SCMT	040205-GH-E	4.80	2.2	2.4	0.5	7°	●	●	●		
				050205-GH-E	5.25	2.6	2.4	0.5	7°	●	●	●		
				060205-GH-E	6.40	2.8	2.9	0.5	7°	●	●	●		
				070305-GH-E	7.65	3.2	3.5	0.5	7°	●	●	●		
				090405-GH-E	9.10	4.1	4.0	0.5	7°	●	●	●		
				110406-GH-E	11.00	4.5	4.6	0.6	7°	●	●	●		
				140508-GH-E	13.80	5.0	5.7	0.8	7°	●	●	●		
170608-GH-E	16.80	6.58	6.9	0.8	7°	●	●	●						
		For soft steel machining	NEW	SCMT	040205-XM-E	4.80	2.2	2.4	0.5	7°	●	●		
				050205-XM-E	5.25	2.6	2.4	0.5	7°	●	●			
				060205-XM-E	6.40	2.8	2.9	0.5	7°	●	●			
				070305-XM-E	7.65	3.2	3.5	0.5	7°	●	●			
				090405-XM-E	9.10	4.1	4.0	0.5	7°	●	●			
				110406-XM-E	11.00	4.5	4.6	0.6	7°	●	●			
				140508-XM-E	13.80	5.0	5.7	0.8	7°	●	●			
				170608-XM-E	16.80	6.58	6.9	0.8	7°	●	●			
		For stainless steel machining	NEW	LCMT	030203-SM-E	4.40/5.54	2.0	2.3	0.3	7°	●	●		
				SCMT	040205-SM-E	4.80	2.2	2.4	0.5	7°	●	●		
					050205-SM-E	5.25	2.6	2.4	0.5	7°	●	●		
					060205-SM-E	6.40	2.8	2.9	0.5	7°	●	●		
					070305-SM-E	7.65	3.2	3.5	0.5	7°	●	●		
					090405-SM-E	9.10	4.1	4.0	0.5	7°	●	●		
					110406-SM-E	11.00	4.5	4.6	0.6	7°	●	●		
					140508-SM-E	13.80	5.0	5.7	0.8	7°	●	●		
170608-SM-E	16.80	6.58	6.9	0.8	7°	●	●							

* LCMT03*** is a 2-edge insert

●: Available

DRV insert

Usage classification			P	Carbon steel • Alloy steel		☆	★		★			
★: 1st recommendation (High speed and highly efficient machining) ☆: 2nd recommendation (Stable machining oriented)				Mold steel		☆	★		★			
				M	Stainless steel	☆	★		★			
				K	Cast iron	☆		★	★			
Shape	Application	Description	Dimensions (mm)				Angle	MEGACOAT	CVD coated carbide		MEGACOAT NANO	
			IC W1/L	S	D1	RE	AN	PR1225	CA520D	CA415D	PR1535	
 LCMT  SCMT General purpose	Inner edge	LCMT	030205-GM-I	4.16/5.37	2.0	2.3	0.5	7°				●
		SCMT	040209-GM-I	5.00	2.2	2.4	0.9	7°				●
			050210-GM-I	5.70	2.6	2.4	1.0	7°				●
			060210-GM-I	6.90	2.8	2.9	1.0	7°				●
			070310-GM-I	8.20	3.2	3.5	1.0	7°				●
			090410-GM-I	9.80	4.1	4.0	1.0	7°				●
			110410-GM-I	11.90	4.5	4.6	1.0	7°				●
			140510-GM-I	14.90	5.0	5.7	1.0	7°				●
		170610-GM-I	17.90	6.58	6.9	1.0	7°				●	
NEW LCMT		030205-GH-I	4.16/5.37	2.0	2.3	0.5	7°				●	
SCMT		040209-GH-I	5.00	2.2	2.4	0.9	7°				●	
		050210-GH-I	5.70	2.6	2.4	1.0	7°				●	
		060210-GH-I	6.90	2.8	2.9	1.0	7°				●	
		070310-GH-I	8.20	3.2	3.5	1.0	7°				●	
		090410-GH-I	9.80	4.1	4.0	1.0	7°				●	
		110410-GH-I	11.90	4.5	4.6	1.0	7°				●	
		140510-GH-I	14.90	5.0	5.7	1.0	7°				●	
170610-GH-I		17.90	6.58	6.9	1.0	7°				●		
SCMT	040209-XM-I	5.00	2.2	2.4	0.9	7°				●		
	050210-XM-I	5.70	2.6	2.4	1.0	7°				●		
	060210-XM-I	6.90	2.8	2.9	1.0	7°				●		
	070310-XM-I	8.20	3.2	3.5	1.0	7°				●		
	090410-XM-I	9.80	4.1	4.0	1.0	7°				●		
	110410-XM-I	11.90	4.5	4.6	1.0	7°				●		
	140510-XM-I	14.90	5.0	5.7	1.0	7°				●		
	170610-XM-I	17.90	6.58	6.9	1.0	7°				●		
LCMT	030205-SM-I	4.16/5.37	2.0	2.3	0.5	7°				●		
	SCMT	040209-SM-I	5.00	2.2	2.4	0.9	7°				●	
		050210-SM-I	5.70	2.6	2.4	1.0	7°				●	
		060210-SM-I	6.90	2.8	2.9	1.0	7°				●	
		070310-SM-I	8.20	3.2	3.5	1.0	7°				●	
		090410-SM-I	9.80	4.1	4.0	1.0	7°				●	
		110410-SM-I	11.90	4.5	4.6	1.0	7°				●	
		140510-SM-I	14.90	5.0	5.7	1.0	7°				●	
	170610-SM-I	17.90	6.58	6.9	1.0	7°				●		

* LCMT03*** is a 2-edge insert

● : Available



For MagicDrill DRV

Chamfering attachment

Free-positioning according to the drilling depth
Versatile chamfering attachment

1

Double inserts provide high efficiency machining

2 inserts allow for increased feed rates
Low cutting force reduces chattering during increased feed rates

2

Excellent chip evacuation


Chip flow grooves are designed to follow the flutes of the drill body delivering excellent chip evacuation

3

High chattering resistance

Molded chipbreaker on chamfering insert reduces cutting force
Special insert design prevents fracturing on the edge
Economical 2 edge inserts


Unique insert design



Molded chipbreaker


Unique insert with 2 cutting edges for chamfering attachment

Two inserts

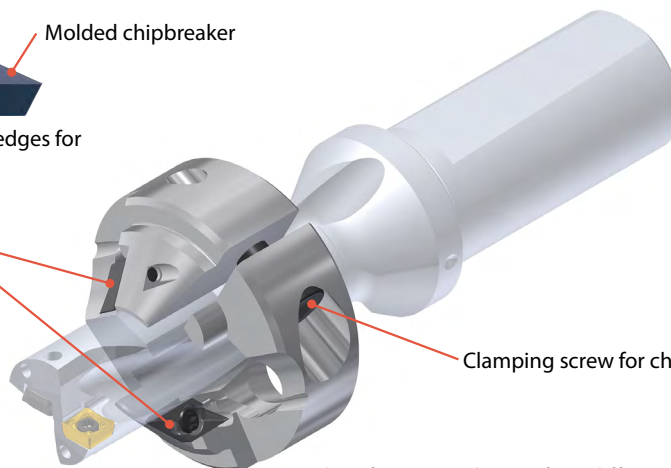

Clamping screw for chamfering attachment

Chamfering attachment for 2 different size drills

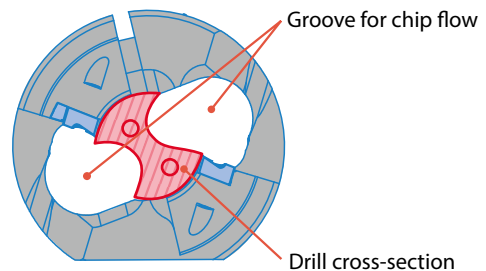

Groove for chip flow

Drill cross-section

Chattering resistance comparison (In-house evaluation)

Provided good surface finish on the chamfer without chattering

DRV-CH-20
(Cutting dia. $\varnothing 20$)



DRV-CH-20
Smooth surface without chattering

Competitor O
(Cutting dia. $\varnothing 20$)



Competitor O
Chattering occurred on the chamfer

Cutting conditions


$V_c = 100$ m/min
 $f = 0.15$ mm/rev

$V_c = 120$ m/min
 $f = 0.10$ mm/rev

$V_c = 120$ m/min
 $f = 0.12$ mm/rev


Workpiece: S45C
Machine: Machining center BT-50
 $\varnothing 20$ -3D, H = 30 mm, C2.0

Chamfering attachment

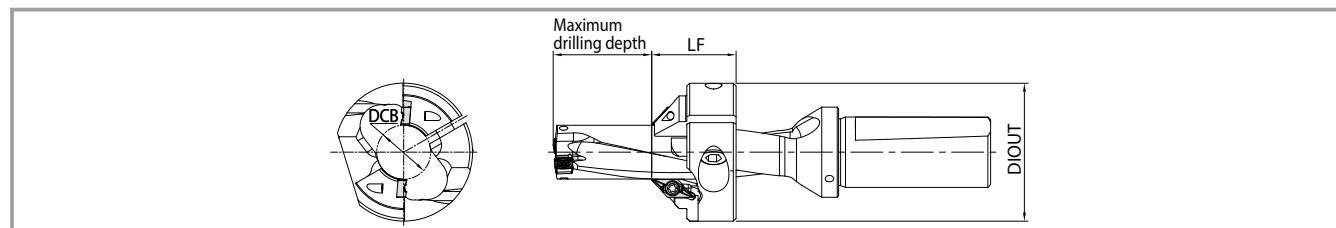


Description	Availability	Applicable drill bodies	Dimensions (mm)			Applicable inserts	Parts			
			DIOUT	DCB	LF		Clamp screw	Wrench	Clamping screw	Wrench
DRV-CH17	●	S25-DRV165M-○-05 S25-DRV170M-○-05	47	16.2	30	CH0503-45	SB-3080TR	FT-10	HH6X18	LW-5
DRV-CH18	●	S25-DRV175M-○-05 S25-DRV180M-○-05	47	17.2	30					
DRV-CH19	●	S25-DRV185M-○-05 S25-DRV190M-○-06	49	18.2	30					
DRV-CH20	●	S25-DRV195M-○-06 S25-DRV200M-○-06	49	19.2	30					
DRV-CH21	●	S25-DRV205M-○-06 S25-DRV210M-○-06	49	20.2	30					
DRV-CH22	●	S25-DRV215M-○-06 S25-DRV220M-○-06	49	21.2	30					
DRV-CH23	●	S25-DRV225M-○-07 S25-DRV230M-○-07	51	22.2	30					
DRV-CH24	●	S25-DRV235M-○-07 S25-DRV240M-○-07	51	23.2	30					
DRV-CH25	●	S25-DRV245M-○-07 S25-DRV250M-○-07	53	24.2	30					
DRV-CH26	●	S25-DRV255M-○-07 S25-DRV260M-○-07	53	25.2	30					
DRV-CH27	●	S32-DRV265M-○-09 S32-DRV270M-○-09	64	26	35				HH8X20	LW-6

Maximum drilling depth • Chamfering depths

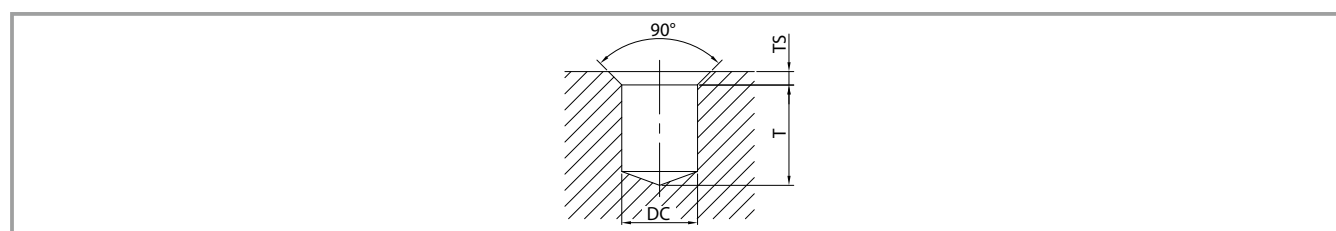


Drilling diameter (mm)		Maximum drilling depth T (mm)					Maximum chamfering depth (mm)	Applicable chamfering attachment
DC		2D drill	3D drill	4D drill	5D drill	6D drill	TS	
ø16.5	0.5	17	33.5	—	—	—	2.5	DRV-CH17
ø17	1.5	18.5	35.5	52.5	69.5	—		DRV-CH18
ø17.5	2.5	20	37.5	—	—	—		DRV-CH19
ø18	3.5	21.5	39.5	57.5	75.5	—		DRV-CH20
ø18.5	4.5	23	41.5	—	—	—		DRV-CH21
ø19	5.5	24.5	43.5	62.5	81.5	—		DRV-CH22
ø19.5	6.5	26	45.5	—	—	—		DRV-CH23
ø20	7.5	27.5	47.5	67.5	87.5	—		DRV-CH24
ø20.5	8.5	29	49.5	—	—	—		DRV-CH25
ø21	9.5	30.5	51.5	72.5	93.5	—		DRV-CH26
ø21.5	10.5	32	53.5	—	—	—		DRV-CH27
ø22	11.5	33.5	55.5	77.5	99.5	—		
ø22.5	12.5	35	57.5	—	—	—		
ø23	13.5	36.5	59.5	82.5	105.5	—		
ø23.5	14.5	38	61.5	—	—	—		
ø24	15.5	39.5	63.5	87.5	111.5	—		
ø24.5	16.5	41	65.5	—	—	—		
ø25	17.5	42.5	67.5	92.5	117.5	—		
ø25.5	18.5	44	69.5	—	—	—		
ø26	19.5	45.5	71.5	97.5	123.5	—		
ø26.5	—	47	—	—	—	—		
ø27	16.5	43.5	75.5	97.5	124.5	—		

Applicable inserts

Shape		Description	Dimensions (mm)		MEGACOAT NANO	Applicable chamfering attachment
			W1	S	PR1535	
		CH0503-45	7.05	3.18	●	DRV-CH ○○

●: Available

How to install chamfering attachment

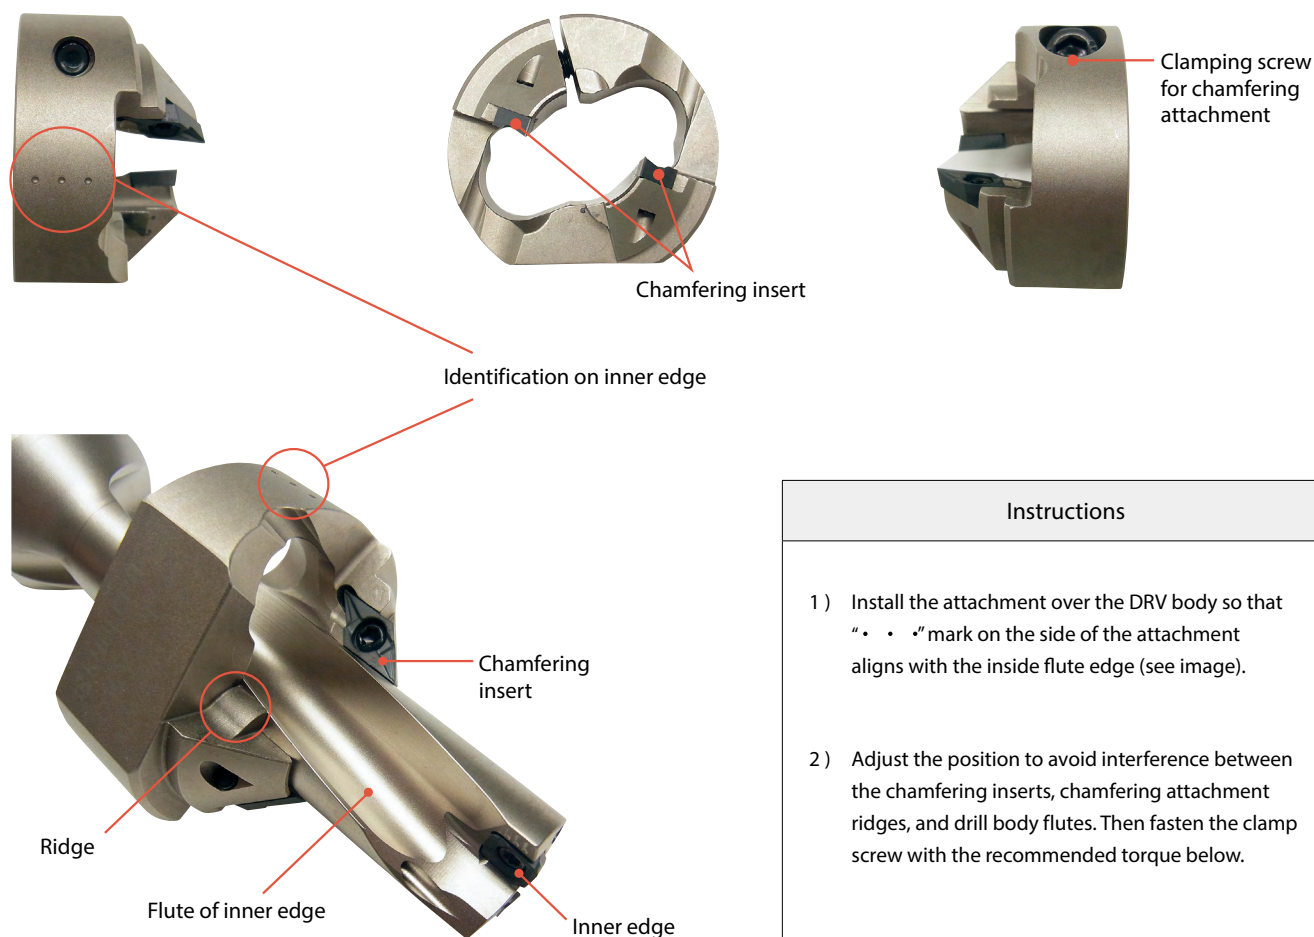

Instructions

- 1) Install the attachment over the DRV body so that "• • •" mark on the side of the attachment aligns with the inside flute edge (see image).
- 2) Adjust the position to avoid interference between the chamfering inserts, chamfering attachment ridges, and drill body flutes. Then fasten the clamp screw with the recommended torque below.

Recommended torque

Chamfering attachment description	Torque (N • m)	Clamping screw	Wrench
DRV-CH17 ~ CH26	10	HH6X18	LW-5
DRV-CH27	14	HH8X20	LW-6

Recommended cutting conditions (2D, 3D, 4D) ★ 1st recommendation ☆ 2nd recommendation

■ DRV recommended cutting conditions (Wet)

Workpiece	Recommended insert grade (Cutting conditions Vc: m/min)										Cutting dia. DC (mm)	Holder type (Drilling depth)				Holder type (Drilling depth)				
	PVD coated carbide				CVD coated carbide							2D,3D				4D				
	PR1225				CA520D				CA415D			f (mm/rev)				f (mm/rev)				
	GM	GH	XM	SM	GM	GH	XM	SM	GM	GH		GM	GH	XM	SM	GM	GH	XM	SM	
Low carbon steel (SS400, S15C etc.)	—	—	★ 120- 200	☆ 120- 200	—	—	★ 150- 280	☆ 150- 280	—	—	ø12 - ø13.5	—	—	—	0.04 - 0.06	—	—	—	0.04 - 0.06	
											ø14 - ø15.5	—	—	0.04 - 0.09	0.04 - 0.07	—	—	0.04 - 0.08	0.04 - 0.07	
											ø16 - ø18.5	—	—	0.04 - 0.10	0.04 - 0.08	—	—	0.04 - 0.08	0.04 - 0.08	
											ø19 - ø22	—	—	0.04 - 0.12	0.04 - 0.08	—	—	0.04 - 0.10	0.04 - 0.08	
											ø22.5 - ø26	—	—	0.04 - 0.14	0.06 - 0.10	—	—	0.04 - 0.12	0.05 - 0.10	
											ø26.5 - ø32	—	—	0.06 - 0.14	0.06 - 0.10	—	—	0.04 - 0.12	0.05 - 0.10	
											ø33 - ø39	—	—	0.06 - 0.14	0.06 - 0.10	—	—	0.06 - 0.12	0.05 - 0.10	
											ø40 - ø60	—	—	0.06 - 0.16	0.08 - 0.12	—	—	0.06 - 0.16	0.05 - 0.10	
Carbon steel (S45C etc.)	★ 100- 180	☆ 100- 180	☆ 100- 180	☆ 100- 180	★ 150- 280	☆ 150- 280	☆ 150- 280	☆ 150- 280	—	—	ø12 - ø13.5	0.04 - 0.14	0.04 - 0.14	—	0.04 - 0.10	0.04 - 0.10	0.04 - 0.10	—	0.04 - 0.08	
											ø14 - ø15.5	0.04 - 0.14	0.04 - 0.14	0.04 - 0.10	0.04 - 0.10	0.04 - 0.10	0.04 - 0.10	0.04 - 0.08	0.04 - 0.08	
											ø16 - ø18.5	0.06 - 0.16	0.06 - 0.16	0.06 - 0.12	0.06 - 0.12	0.05 - 0.12	0.05 - 0.12	0.04 - 0.10	0.05 - 0.10	
											ø19 - ø26	0.08 - 0.20	0.08 - 0.20	0.06 - 0.14	0.06 - 0.14	0.07 - 0.16	0.07 - 0.16	0.04 - 0.12	0.05 - 0.12	
											ø26.5 - ø32	0.08 - 0.20	0.08 - 0.20	0.06 - 0.14	0.06 - 0.14	0.07 - 0.16	0.07 - 0.16	0.04 - 0.12	0.05 - 0.12	
											ø33 - ø39	0.08 - 0.20	0.08 - 0.20	0.06 - 0.16	0.06 - 0.14	0.07 - 0.16	0.07 - 0.16	0.06 - 0.14	0.05 - 0.12	
											ø40 - ø60	0.08 - 0.20	0.08 - 0.20	0.06 - 0.18	0.06 - 0.14	0.07 - 0.16	0.07 - 0.16	0.06 - 0.16	0.05 - 0.12	
Alloy steel (SCM, SCr etc.)	★ 100- 160	☆ 100- 160	☆ 100- 160	—	★ 140- 220	☆ 140- 220	☆ 140- 220	—	—	—	ø12 - ø13.5	0.04 - 0.12	0.04 - 0.12	—	—	0.04 - 0.10	0.04 - 0.10	—	—	
											ø14 - ø15.5	0.04 - 0.14	0.04 - 0.14	—	—	0.04 - 0.10	0.04 - 0.10	—	—	
											ø16 - ø18.5	0.06 - 0.16	0.06 - 0.16	—	—	0.05 - 0.12	0.05 - 0.12	—	—	
											ø19 - ø39	0.08 - 0.20	0.08 - 0.20	—	—	0.07 - 0.16	0.07 - 0.16	—	—	
											ø40 - ø60	0.08 - 0.20	0.08 - 0.20	—	—	0.07 - 0.16	0.07 - 0.16	—	—	
Mold steel (SKD etc.)	☆ 80-150	★ 80-150	—	—	☆ 130- 210	★ 130- 210	—	—	—	—	ø12 - ø15.5	0.04 - 0.08	0.04 - 0.08	—	—	0.04 - 0.07	0.04 - 0.07	—	—	
											ø16 - ø18.5	0.06 - 0.12	0.06 - 0.12	—	—	0.05 - 0.10	0.05 - 0.10	—	—	
											ø19 - ø32	0.08 - 0.15	0.08 - 0.15	—	—	0.06 - 0.12	0.06 - 0.12	—	—	
											ø33 - ø39	0.08 - 0.15	0.08 - 0.15	—	—	0.06 - 0.12	0.06 - 0.12	—	—	
											ø40 - ø60	0.08 - 0.15	0.08 - 0.15	—	—	0.06 - 0.12	0.06 - 0.12	—	—	
Stainless steel (Austenitic)	—	—	—	★ 70-140	—	—	—	★ 140- 200	—	—	ø12 - ø15.5	—	—	—	0.04 - 0.10	—	—	—	0.04 - 0.08	
											ø16 - ø18.5	—	—	—	0.06 - 0.12	—	—	—	0.05 - 0.11	
											ø19 - ø60	—	—	—	0.06 - 0.14	—	—	—	0.06 - 0.12	
Gray cast iron (FC)	☆ 100- 150	★ 100- 150	—	—	—	—	—	—	—	☆ 150- 220	★ 150- 220	ø12 - ø13.5	0.08 - 0.14	0.08 - 0.14	—	—	0.06 - 0.10	0.06 - 0.10	—	—
												ø14 - ø15.5	0.08 - 0.14	0.08 - 0.14	—	—	0.06 - 0.12	0.06 - 0.12	—	—
												ø16 - ø18.5	0.08 - 0.18	0.08 - 0.18	—	—	0.08 - 0.16	0.08 - 0.16	—	—
												ø19 - ø39	0.08 - 0.20	0.08 - 0.20	—	—	0.08 - 0.18	0.08 - 0.18	—	—
												ø40 - ø60	0.08 - 0.20	0.08 - 0.20	—	—	0.08 - 0.18	0.08 - 0.18	—	—
Nodular cast iron (FCD)	☆ 80-120	★ 80-120	—	—	—	—	—	—	—	☆ 120- 180	★ 120- 180	ø12 - ø15.5	0.08 - 0.12	0.08 - 0.12	—	—	0.06 - 0.10	0.06 - 0.10	—	—
												ø16 - ø18.5	0.08 - 0.16	0.08 - 0.16	—	—	0.08 - 0.14	0.08 - 0.14	—	—
												ø19 - ø39	0.08 - 0.18	0.08 - 0.18	—	—	0.08 - 0.16	0.08 - 0.16	—	—
												ø40 - ø60	0.08 - 0.18	0.08 - 0.18	—	—	0.08 - 0.16	0.08 - 0.16	—	—

Internal coolant is recommended

Recommended cutting conditions (5D, 6D) ★ 1st recommendation ☆ 2nd recommendation

■ DRV recommended cutting conditions (Wet)

Workpiece	Recommended insert grade (Cutting conditions Vc: m/min)										Cutting dia. DC (mm)	Holder type (Drilling depth)				Holder type (Drilling depth)				
	PVD coated carbide					CVD coated carbide						5D				6D				
	PR1225					CA520D				CA415D		f (mm/rev)				f (mm/rev)				
	GM	GH	XM	SM	GM	GH	XM	SM	GM	GH		GM	GH	XM	SM	GM	GH	XM	SM	
Low carbon steel (S5400,S15C etc.)	—	—	★ 120- 200	☆ 120- 200	—	—	★ 150- 280	☆ 150- 280	—	—	ø12 - ø13.5	—	—	—	0.03 - 0.05	—	—	—	0.03 - 0.05	
											ø14 - ø15.5	—	—	0.04 - 0.07	0.04 - 0.06	—	—	0.04 - 0.06	0.04 - 0.06	
											ø16 - ø18.5	—	—	0.04 - 0.08	0.04 - 0.06	—	—	0.04 - 0.06	0.04 - 0.06	
											ø19 - ø22	—	—	0.04 - 0.10	0.04 - 0.07	—	—	0.04 - 0.07	0.04 - 0.07	
											ø22.5 - ø26	—	—	0.04 - 0.12	0.04 - 0.08	—	—	0.04 - 0.08	0.04 - 0.07	
											ø26.5 - ø32	—	—	0.04 - 0.12	0.04 - 0.08	—	—	0.04 - 0.08	0.04 - 0.07	
											ø33 - ø39	—	—	0.05 - 0.12	0.04 - 0.10	—	—	0.04 - 0.09	0.04 - 0.08	
											ø40 - ø60	—	—	0.06 - 0.14	0.04 - 0.10	—	—	0.06 - 0.12	0.04 - 0.08	
Carbon steel (S45C etc.)	★ 100- 180	☆ 100- 180	☆ 100- 180	☆ 100- 180	★ 150- 280	☆ 150- 280	☆ 150- 280	☆ 150- 280	—	—	ø12 - ø13.5	0.04 - 0.08	0.04 - 0.08	—	0.04 - 0.07	0.03 - 0.05	0.03 - 0.05	—	0.03 - 0.05	
											ø14 - ø15.5	0.04 - 0.08	0.04 - 0.08	0.04 - 0.07	0.04 - 0.07	0.04 - 0.06	0.04 - 0.06	0.04 - 0.06	0.04 - 0.06	
											ø16 - ø18.5	0.05 - 0.10	0.05 - 0.10	0.05 - 0.08	0.05 - 0.08	0.05 - 0.08	0.05 - 0.08	0.05 - 0.07	0.05 - 0.07	
											ø19 - ø26	0.06 - 0.12	0.06 - 0.12	0.05 - 0.10	0.05 - 0.10	0.06 - 0.10	0.06 - 0.10	0.05 - 0.08	0.05 - 0.08	
											ø26.5 - ø32	0.06 - 0.12	0.06 - 0.12	0.05 - 0.12	0.05 - 0.10	0.06 - 0.10	0.06 - 0.10	0.05 - 0.08	0.05 - 0.08	
											ø33 - ø39	0.06 - 0.12	0.06 - 0.12	0.05 - 0.12	0.05 - 0.10	0.06 - 0.10	0.06 - 0.10	0.05 - 0.08	0.05 - 0.08	
											ø40 - ø60	0.06 - 0.12	0.06 - 0.12	0.06 - 0.12	0.05 - 0.10	0.06 - 0.10	0.06 - 0.10	0.06 - 0.10	0.05 - 0.08	
Alloy steel (SCM, SCr etc.)	★ 100- 160	☆ 100- 160	☆ 100- 160	-	★ 140- 220	☆ 140- 220	☆ 140- 220	—	—	—	ø12 - ø13.5	0.04 - 0.08	0.04 - 0.08	—	—	0.03 - 0.05	0.03 - 0.05	—	—	
											ø14 - ø15.5	0.04 - 0.08	0.04 - 0.08	—	—	0.04 - 0.06	0.04 - 0.06	—	—	
											ø16 - ø18.5	0.05 - 0.10	0.05 - 0.10	—	—	0.05 - 0.08	0.05 - 0.08	—	—	
											ø19 - ø39	0.06 - 0.12	0.06 - 0.12	—	—	0.06 - 0.10	0.06 - 0.10	—	—	
											ø40 - ø60	0.06 - 0.12	0.06 - 0.12	—	—	0.06 - 0.10	0.06 - 0.10	—	—	
Mold steel (SKD etc.)	☆ 80-150	★ 80-150	—	—	☆ 130- 210	★ 130- 210	—	—	—	—	ø12 - ø13.5	0.04 - 0.06	0.04 - 0.06	—	—	0.03 - 0.05	0.03 - 0.05	—	—	
											ø14 - ø15.5	0.04 - 0.06	0.04 - 0.06	—	—	0.04 - 0.05	0.04 - 0.05	—	—	
											ø16 - ø18.5	0.04 - 0.08	0.04 - 0.08	—	—	0.04 - 0.06	0.04 - 0.06	—	—	
											ø19 - ø39	0.05 - 0.10	0.05 - 0.10	—	—	0.05 - 0.08	0.05 - 0.08	—	—	
											ø40 - ø60	0.05 - 0.10	0.05 - 0.10	—	—	0.05 - 0.08	0.05 - 0.08	—	—	
Stainless steel (Austenitic)	—	—	—	★ 70-140	—	—	—	★ 140- 200	—	—	ø12 - ø13.5	—	—	—	0.04 - 0.08	—	—	—	0.03 - 0.05	
											ø14 - ø15.5	—	—	—	0.04 - 0.08	—	—	—	0.04 - 0.06	
											ø16 - ø18.5	—	—	—	0.04 - 0.10	—	—	—	0.04 - 0.09	
											ø19 - ø60	—	—	—	0.06 - 0.12	—	—	—	0.06 - 0.10	
Gray cast iron (FC)	☆ 100- 150	★ 100- 150	—	—	—	—	—	—	☆ 150- 220	★ 150- 220	ø12 - ø15.5	0.04 - 0.10	0.04 - 0.10	—	—	0.04 - 0.08	0.04 - 0.08	—	—	
											ø16 - ø18.5	0.06 - 0.12	0.06 - 0.12	—	—	0.06 - 0.10	0.06 - 0.10	—	—	
											ø19 - ø39	0.06 - 0.14	0.06 - 0.14	—	—	0.06 - 0.12	0.06 - 0.12	—	—	
											ø40 - ø60	0.06 - 0.14	0.06 - 0.14	—	—	0.06 - 0.12	0.06 - 0.12	—	—	
Nodular cast iron (FCD)	☆ 80-120	★ 80-120	—	—	—	—	—	—	☆ 120- 180	★ 120- 180	ø12 - ø13.5	0.04 - 0.08	0.04 - 0.08	—	—	0.03 - 0.05	0.03 - 0.05	—	—	
											ø14 - ø15.5	0.04 - 0.08	0.04 - 0.08	—	—	0.04 - 0.06	0.04 - 0.06	—	—	
											ø16 - ø18.5	0.06 - 0.10	0.06 - 0.10	—	—	0.06 - 0.08	0.06 - 0.08	—	—	
											ø19 - ø39	0.06 - 0.12	0.06 - 0.12	—	—	0.06 - 0.10	0.06 - 0.10	—	—	
											ø40 - ø60	0.06 - 0.12	0.06 - 0.12	—	—	0.06 - 0.10	0.06 - 0.10	—	—	

Internal coolant is recommended

Cutting conditions by application

Application	Plain surface	Slant surface	Half cylindrical	Hole expansion	Pre-drilled surface	Concave surface	Stacked plates
Workpiece							
Vc (m/min)	See recommended cutting conditions above	120 (PVD insert is recommended for outer edge)					Not recommended
f (mm/rev)	See recommended cutting conditions above	Half of the above recommended conditions is recommended				Concave surface: Half of the above recommended conditions is recommended	
						Continuous: See recommended cutting conditions above	
Coolant (Internal coolant)	Yes						

Insert grade selection guide

Select CVD for the outer edge when performing high speed and high efficiency machining. Machining for high efficiency, abrasion resistance and long tool life.

Select PVD for the outer edge when for stable machining and a better surface finish.

PVD is recommended for the outer edge if chattering occurs or machining with lathe is not available even if cutting conditions are increased.


1st recommendation

(High speed and high efficiency machining)

Outer edge: CVD (CA520D/CA415D)



Inner edge: PVD (PR1535)




Stable machining oriented

(1st recommendation for lathe machining)

Outer edge: PVD (PR1225)



Inner edge: PVD (PR1535)




Shape of the hole bottom

Chip size	DC	A	Chip size	DC	A	Chip size	DC	A	Chip size	DC	A	Chip size	DC	A
03	12.0	0.70	06	19.0	1.2	07	22.5	1.2	09	26.5	1.2	14	40.0	1.9
	12.5			19.5			23.0			27.0			41.0	
	13.0			20.0			23.5			27.5	42.0			
	13.5			20.5	24.0		28.0	43.0		2.0				
04	14.0	1.0	21.0	24.5	28.5	1.3	44.0							
	14.5		21.5	25.0	29.0		45.0	2.1						
	15.0		22.0	25.5	29.5	46.0								
	15.5			26.0	30.0	47.0								
05	16.0	1.1					1.4	30.5	1.5	48.0	2.2			
	16.5							31.0		49.0				
	17.0							31.5		50.0	2.0			
	17.5							32.0		51.0				
	18.0	1.2					11	33.0	1.5	52.0	2.1			
	18.5							34.0		53.0				
										35.0	1.6	54.0	2.2	
									36.0	55.0				
							37.0		1.7	56.0	2.3			
							38.0			57.0				
							39.0		58.0	2.4				
									59.0					
									60.0					

Common for 2D, 3D, 4D, 5D and 6D drills.
* The above values are estimate values.
(Varies by approximately +0.1 mm depending on workpiece and cutting conditions, etc.)


Cautions for machining



In case of through-hole machining, disc may be generated and ejected outward when drilling a hole.

Be sure to install covers to protect against dangers if using a machine without the covers including general-purpose lathes, etc.

Adjustable sleeve (Cutting dia./Center height adjustment)

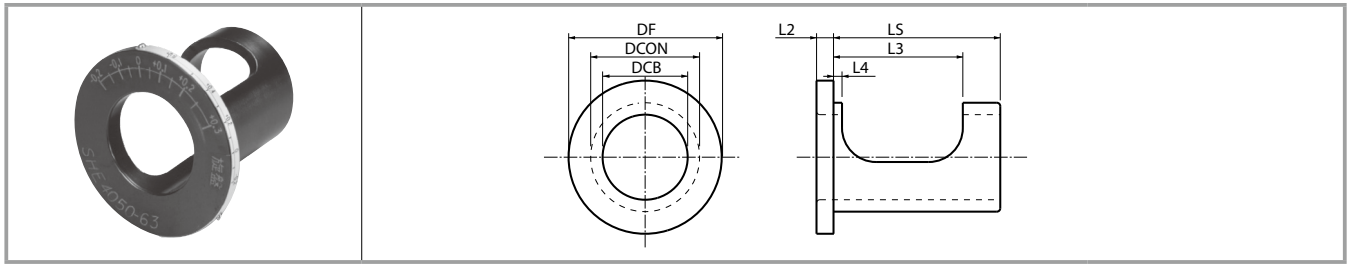


Sleeve dimensions

Description	Availability	Dimensions (mm)								Dia. adjustment range*	Center height adjustment range
		DCB	DCON	DF	LS	L2	L3	L4			
SHE	2025-43	●	20	25	41	43	4	36	3.0	+0.4 ~ -0.2	+0.2 ~ -0.15
	2532-48	●	25	32	49	48	6	38	2.5	+0.4 ~ -0.2	+0.2 ~ -0.15
	3240-53	●	32	40	58	53	6	43	2.5	+0.4 ~ -0.2	+0.2 ~ -0.15
	4050-63	●	40	50	74	63	6	49	3.0	+0.6 ~ -0.2	+0.2 ~ -0.2

* Dia. adjustment range refers to the cutting diameter.

● : Available


1 Diameter adjustment: For machining center



■ Diameter adjustment range (mm)

Shank dia.	Adjustment range
ø20	+0.4 ~ -0.2
ø25	
ø32	
ø40	+0.6 ~ -0.2

2 Center height adjustment: Fewer height adjustment problems for lathes



■ Center height adjustment range (mm)

Shank dia.	Adjustment range
ø20	+0.2 ~ -0.15
ø25	
ø32	
ø40	+0.3 ~ -0.2

How to use


1 Hole diameter adjustment when drilling

1. Align the scale at the flange periphery of the sleeve to the center of the coolant plug of the drill. (Fig. 1)
2. When making the hole diameter bigger, rotate the sleeve in the (+) direction and to make it smaller, rotate the sleeve in the (-) direction.
3. When rotating the sleeve, insert the wrench supplied with the drill into the hole on the flange periphery to rotate the sleeve.
4. Using the bottom screw of the side-lock arbor, firmly tighten the drill directly through the sleeve's window.

The upper screw should be tightened slightly so that the sleeve will not be damaged.

Caution:

- Not for use with collet chuck type arbor.
- Check the actual cutting diameter after adjusting.

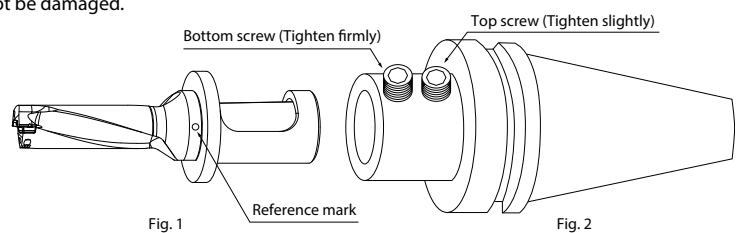


2 Center-height adjustment for lathes

Most of the problems encountered with a turning lathe are center-height deviations. The center height is appropriate if a core of about 0.5 mm diameter remains at the center of the hole. Center-height adjustment is necessary when no core remains or if the core diameter is more than 1 mm.

1. Align the drill with the outer insert face parallel to the X-axis of the tool turret. (Fig. 4)
2. Align the scale (for the lathe) on the flange face of the sleeve to the center of the reference mark.
3. When no core remains, rotate the sleeve in the (+) direction to make the core larger, and when the core diameter is more than 1mm, rotate the sleeve in the (-) direction to make the core smaller.
4. When rotating the sleeve, insert the wrench supplied with the drill into the hole of the flange and then rotate the sleeve.
5. After completing the adjustment, tighten the drill directly through the window on the sleeve.

Caution:

Depending on amount of the center height adjustment, the hole diameter may change. It is recommended that the hole diameter is checked after the center height adjustment.

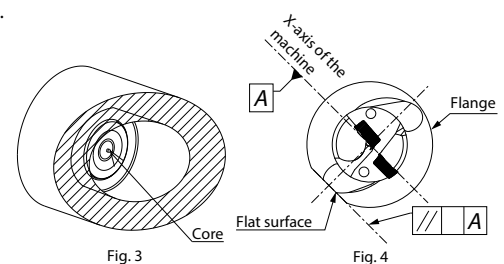

Lathe installation

1. The top face of the outer insert should be parallel to the X-axis to allow for offset cutting.
(Cutting diameter can be changed by moving X-axis.)
2. It is recommended to set the outer insert as shown in Fig. 1 with the outer insert facing the operator. (Fig. 1)
(It is also possible to use it by setting it in 180° reverse position)
If the lathe has two turrets, when installing the drill into the lower turret, the outer insert should be set to face the operator.
(It is also possible to use it by setting it at 180° reverse position)

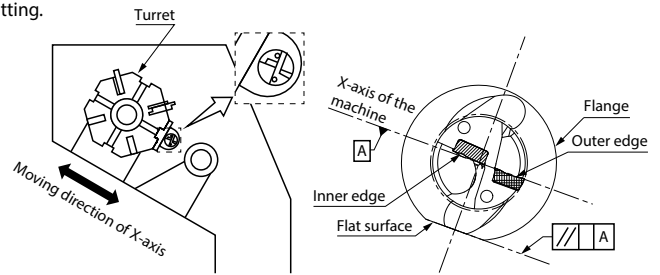


Fig. 1 Installed into the lathe

Cutting diameter adjustment

1 Cutting diameter adjustment

1. Cutting diameter is adjusted by moving X-axis.
The moving direction of the X-axis depends on the position of the toolholder.
2. For making the hole diameter larger, slide the tool along the X-axis toward the outer insert side. (Fig. 2, Fig. 3)
For making the hole diameter smaller, slide the tool along the X-axis in the opposite direction.
(This movement of the axis is called "Offset")
Be sure not to make the hole diameter smaller than the drill diameter by 0.2 mm or more. Otherwise, the toolholder will interfere with the drilled hole. (Fig. 4)
Ex.: When using $\phi 20$ drill, the hole diameter must not be smaller than 19.8 mm

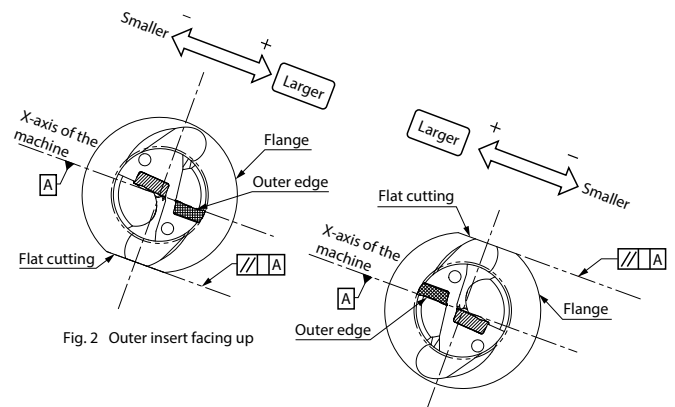


Fig. 2 Outer insert facing up

Fig. 3 Outer insert facing down

2 Offset limit of the cutting diameter

For the maximum limit of the cutting diameter, refer to "Max. offset (Radial)" in the toolholder dimensions table.
(The figure in the toolholder dimensions table shows how much it is possible to offset the drill in the radial direction.)
Ex.: When using $\phi 20$ drill, for example, it is possible to make a hole up to $\phi 21.1$ since "Max. offset (Radial)" is +0.55 mm.

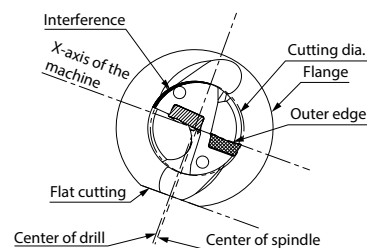


Fig. 4 Excessive offset (For smaller hole diameter)

Center height adjustment

1 Center height of the inner insert

When installing inner insert as shown in Fig. 1, It will be set around 0.05 mm below the center of spindle. (Fig. 5)
This is the normal position of the center height. However, in case that the turret of the lathe is out of the center of spindle, sometimes the inner insert may be set above or below the center. For stable machining, it is essential to check the center height carefully

2 How to check the center height

For checking the center height of the inner insert, see the core which remains at the center of the bottom of the drilled hole. If the center height is in the normal position, a core about 0.5 mm in diameter, will remain after machining. (Fig. 6)
Adjustment of center height is required if a large core diameter of 1 mm or more remains.
* The drilled hole for verification purposes needs to be machined at approximately 10 mm in depth and at a feed rate of 0.1 mm/rev or lower.




Fig. 5 Front view of the drill




Fig. 6 Center core

3 Center height adjustment

1. When there are no remaining cores and the vicinity of the drill center of the inner edge is damaged

This happens when the inner insert is set above the center height. (Fig. 7)

How to adjust
A. Install the drill rotated by 180° Most problems will be solved by this method (Fig. 8) B. If the core diameter becomes too large after the above adjustment, install the drill by rotating 90° counter-clockwise as shown in Fig. 9 (outer edge is positioned lower) and adjust the center height by moving the tool in the X-axis direction. (However, this will make it impossible to adjust the cutting diameter) Caution: When installing the drill in the opposite direction (outer insert is positioned above), the cutting diameter will become smaller, which may cause the drill body to interfere with the drilled hole. The best solution is to readjust the center position of the turret itself.




Fig. 7 Insert breakage near the center of the drill

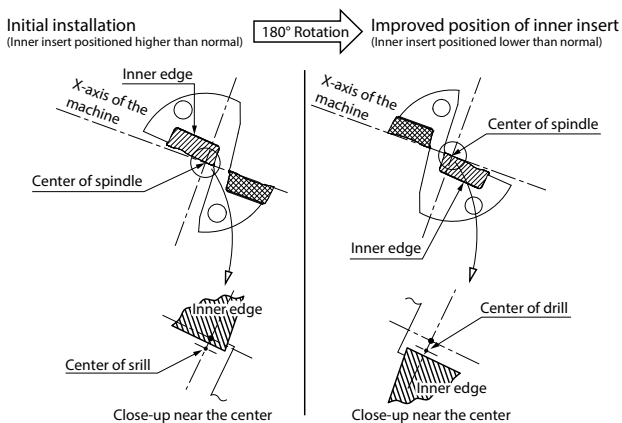


Fig. 8

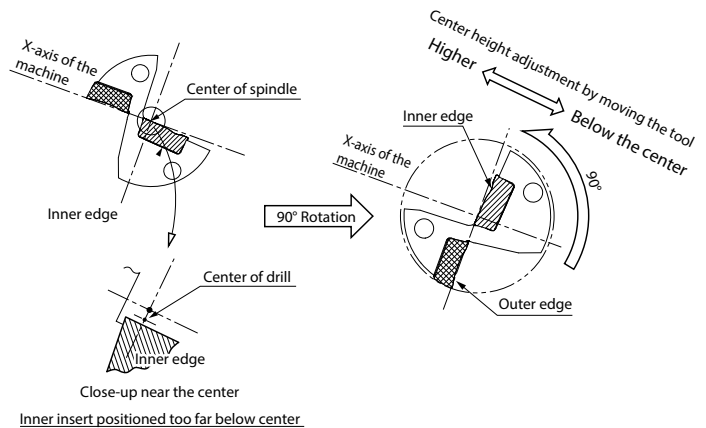


Fig. 9

2. Core with excessively large diameter (more than 1 mm)

This occurs when the inner insert is excessively below the center.
This condition causes poor chip evacuation and an adjustment is required.

How to adjust
Install the drill rotating 90° as shown in Fig. 10. (outer insert is positioned on the upper side) and adjust the center height by moving tool in the X-axis direction. (However, this will make it impossible to adjust the cutting diameter) Caution: When installing the drill in the opposite direction (outer insert is positioned lower), the cutting diameter will become smaller, which may cause the drill body to interfere with the drilled hole. The best solution is to readjust the center position of the turret itself.

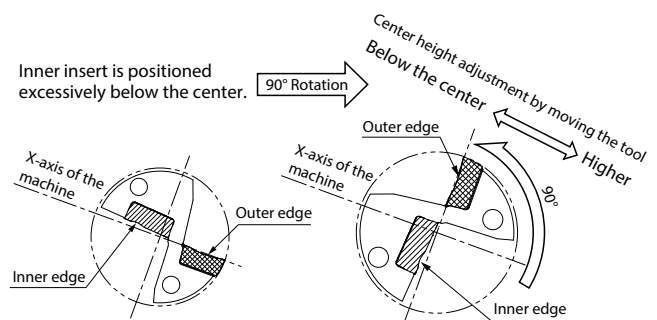


Fig. 10